

**PCBA
NO. 1 CLEANER IN
SURFACE MOUNT**




An ITW Company



PCBA

TECHNICAL SPECIFICATION

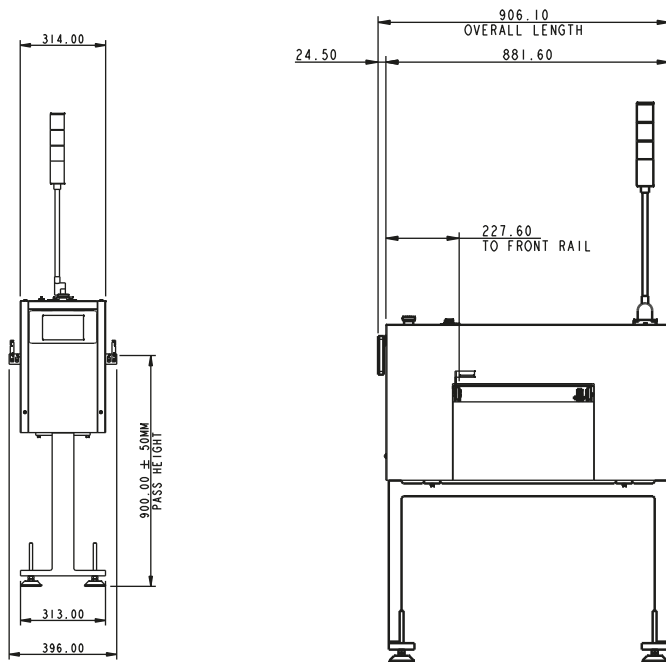

Note: Customer can fit SAR 300 to the PCBA

FEATURES

- Single Side Board Cleaner
- 400mm Cleaning width
- World Class Contact Cleaning
- Controlled Static environment
- Built-in Brush system (optional)
- SMEMA Ready

APPLICATIONS

- Clean inline before Solder Paste Print
- Clean offline after Laser Mark

CAPABILITY

Single Side Board Cleaning	Min-Max Board Length	50mm - N/A
	Min-Max Board Width	40mm - 400mm
	Min-Max Board Thickness	0.6mm - 3.2mm
By-Pass - No Cleaning	Min-Max Board Length	50mm - N/A
	Min-Max Board Width	40mm - 400mm
	Min-Max Board Thickness	0.6mm - 3.2mm

WORLD LEADER IN CONTACT CLEANING

 **Teknek Head Office**
River Drive
Inchinnan Business Park
Renfrewshire, PA4 9RT
Scotland, UK


T: +44 (0)141 568 8100
E: teknek@teknek.com

 **Teknek Japan Ltd**
1-2-4, Minatojima-Nakamachi,
Chuo-ku,
Kobe 650-0046
Japan

T: + 81 (0)78 304 5780
E: japan@teknek.com

 **Teknek China Ltd**
Unit E, 4/F,
Winfield Industrial Building,
3 Kin Kwan Street,
Tuen Mun, N.T.
Hong Kong

T: +852 2468 3160
E: hk@teknek.com

 **Teknek (Simco-Ion)**
2257 North Penn Road
Hatfield,
PA 19440
USA

T: +1 215 822 6401
E: ussales@teknek.com



An ITW Company

INTERNATIONAL STANDARDS COMPLIANCE

Machine is fully grounded
- ANSI/ESD s6.1-2014
- IEC61340-5-1:2016

Nanoclean Rollers
- ANSI/ESD s20.20-2014
- IEC61340-5-1:2016
- ISO 6123 Class A

Adhesive
- FINAT

